


## Parts List







- a. 1 x enclosure (NXSU-18 or 14)
- b. 1 x baseplate (NXSU-18 or 14)
- c. 2 x 20mm brass spacers
- d. 3 x 10mm brass spacers
- e. 3 x m3 round head screws (short)
- f. 4 x antislip rubber feet (2 already fitted)
- g. 4 x m3 round head screws (2 already fitted)
- h. 2 x washers (already assembled to 2 feet)
- i. 4 x m2.5 flat head screws

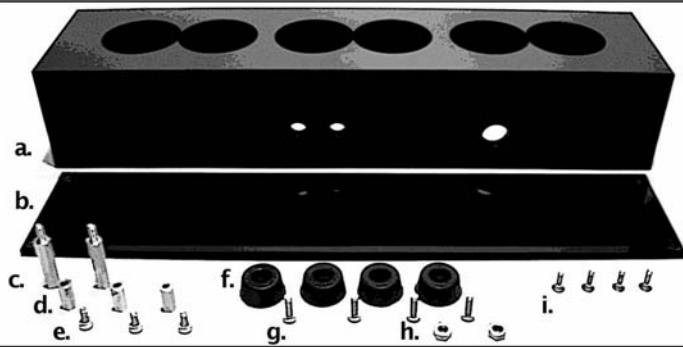

1 Tools required: 1 x Phillips Screwdriver (small)

## Assembly Instructions

1. Check the parts list and ensure all parts are accounted for. Wear cotton gloves if you wish to prevent fingerprints.
2. Screw the 20mm spacers (**part c**) to the 10mm spacers (**part d**) as shown. The middle 10mm spacer supports the tubeboard.
3. Secure the middle 10mm spacer to the clock board with an m3 round head screw (**part e**). All spacers to be finger tight only.
4. Ensure tubes are mounted, now fit the tube board to the clock board and secure it with the two remaining m3 screws (**part e**).
5. At this point, carefully insert your clock kit into the enclosure (**part a**). Check that the DIMM and SET pushbuttons are clear.
- 5a Tightly thread the 2 long m3 screws (**part g**) to the 2 remaining rubber feet, 2 sets are already pre-assembled to the baseplate.
5. While carefully cradling the enclosure with the clock kit within, place the baseplate (**part b**) over the enclosure bottom. Ensure correct orientation - the LED holes align to the 2 LEDs within and holes to the 20mm spacers on the clock kit within. Tightly screw the 2 rubber feet through the baseplate holes to the two 20mm spacers within. Double check the orientation.
6. Finally, carefully screw the 4 supplied m2.5 flat head screws (**part i**) flush with the baseplate. Do not overtighten!

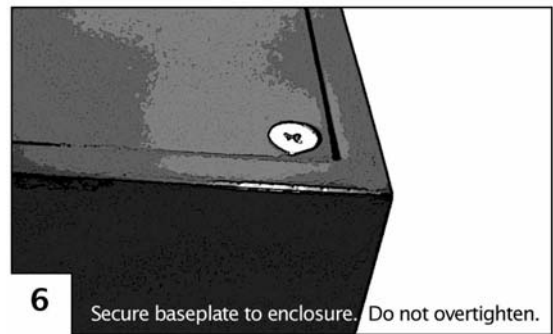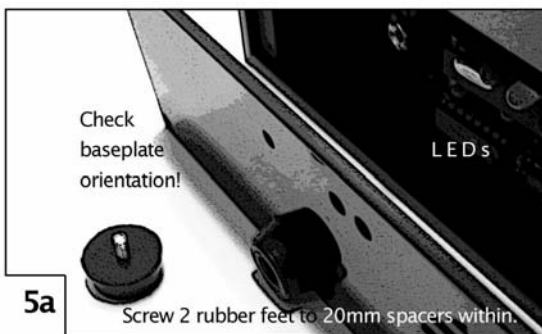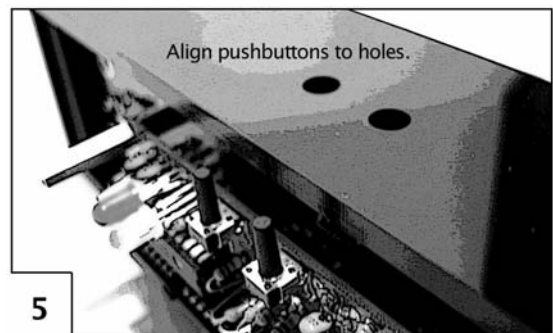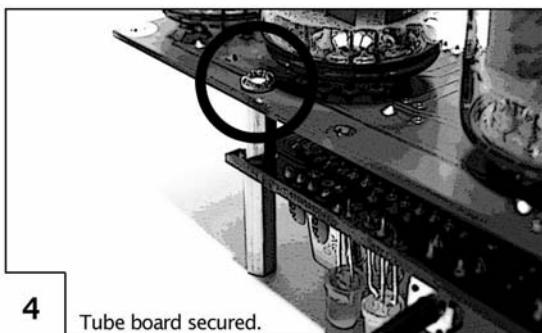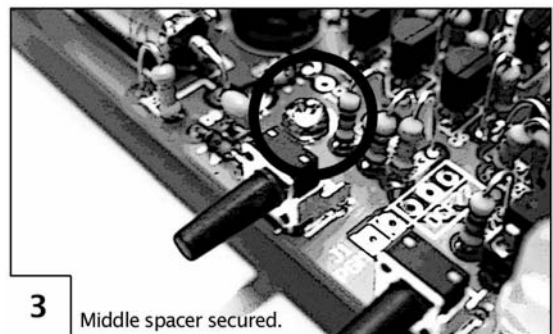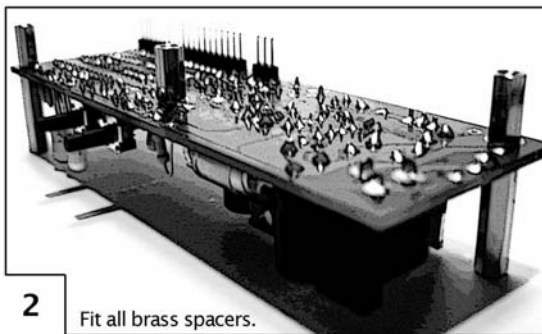

## Care & Maintenance

To prevent fingerprints and scratches on the highly polished finish, always handle your enclosure with care. To clean your enclosure, wipe gently with a quality **microfiber cloth** or clean 100% flannel cotton. If you do not have any of these materials on hand, clean washed out old t-shirt cotton will be ok. **Do not use any other material to wipe your enclosure.**